


Article Number: 382093

2P/24V(168A) Contact (VG 96917 S50)

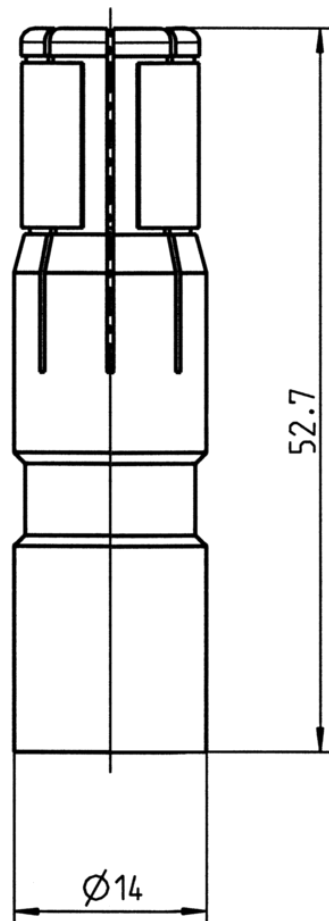

| | |
|------------|--------------------------------|
| Categories | Socket , Accessories , Contact |
| Standards | VG 96917 |
| Industries | Defense vehicles |

Electrical Details and Temperature Resistance

| | |
|---------------------------------------|-----|
| Peak current / short-term load [in A] | 305 |
| Rated current / permanent load [in A] | 168 |
| Voltage [in V] | 24 |

Packaging and Order Details

| | |
|--------------------|------------------|
| NATO stock No. | 5999-12-335-5654 |
| Package unit | pieces |
| Packaging quantity | 1 |

Design Features

| | |
|-----------------|-------------------------|
| Special feature | with surrounding spring |
|-----------------|-------------------------|

Material

| | |
|-----------------|-------------|
| Contact surface | silver (Ag) |
|-----------------|-------------|

Connectivity

| | |
|---------------------|--------------------------------|
| Contact termination | crimp contact , solder contact |
| Contact version | contact sleeve |
| No. of poles | 02 |

Norms and Standards

| | |
|----------------------|-----|
| Addition to standard | S50 |
|----------------------|-----|

Measures and Dimensions

| | |
|---|-------|
| Contact: for max. wire cross section [in mm²] | 50,00 |
|---|-------|